


SPECIALS Planks

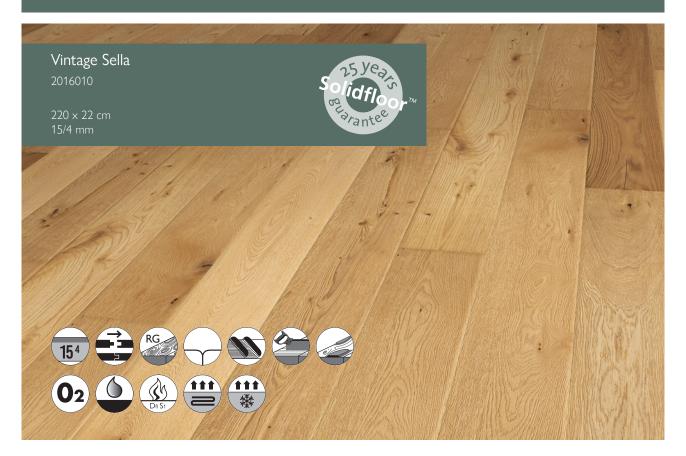

Packaging

Boards per pack: 6 boards m² per pack: 2,904 m² Weight per pack: 25 kg

25% minimal 60 cm length Broken lenghts per pack: 35

Packs on a pallet:

Dimensions

Length: 220 cm Width: 22 cm Thickness (total): 15 mm 3,5-4,0 mm Top layer:

Dimensional tolerances according to EN13489

Length: 0.20% Width: 0,2 mm

Total: 15 mm ± 0,2 mm Thickness:

3,5-4,0 mm Top layer: Height difference between the panels: ≤0,2 mm

≤0.2% across the width Squareness: ≤0.2% across the width Cup: Spring: ≤0.1% over the length Bend: ≤1% over the length

Other Specifications

Formaldehyde emission: Insulation value: R=0,11m2 k/w Brinell hardness: Average HB 3.7

Additional specifications

Rounded Construction: 3-layer 7% +/- 2% Moisture content: Tongue and groove Locking system:

Instructions and Maintenance

Oil immediately after installation.

Maintain with Solidfloor™ Ultimate Hardwax Natural & Solidfloor™ Woodcleaner. Suitable for underfloor heating & cooling (visit www.solidfloor.com for more information).

