


SPECIALS

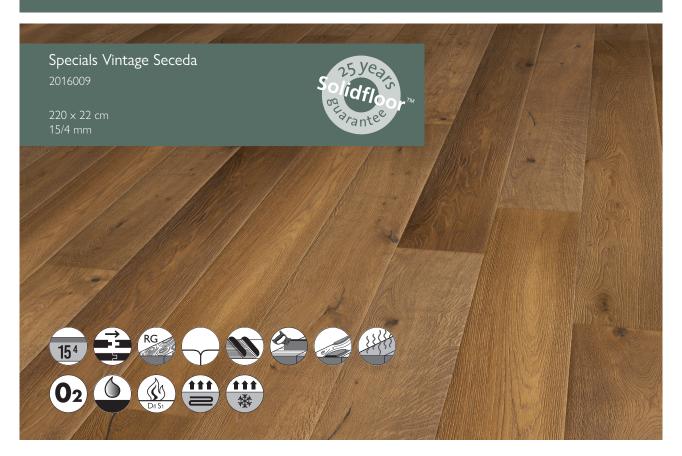

Packaging

Boards per pack: 6 boards m² per pack: 2,904 m² Weight per pack: 25 kg

Broken lenghts per pack: 25% minimal 60 cm length

Packs on a pallet: 35

Dimensions

 Length:
 220 cm

 Width:
 22 cm

 Thickness (total):
 15 mm

 Top layer:
 3,5-4,0 mm

Dimensional tolerances according to EN13489

Length: 0,20% Width: 0,2 mm

Thickness: Total: 15 mm \pm 0,2 mm

Top layer: 3,5-4,0 mm Height difference between the panels: ≤0,2 mm

Squareness: ≤0.2% across the width
Cup: ≤0.2% across the width
Spring: ≤0.1% over the length
Bend: ≤1% over the length

Other Specifications

Formaldehyde emission: E1
Insulation value: R=0,11m2 k/w
Brinell hardness: Average HB 3.7

Additional specifications

Bevel: Rounded
Construction: 3-layerd
Moisture content: 7% +/- 2%
Locking system: Tongue and groove

Instructions and Maintenance

Oil immediately after installation.

Maintain with Solidfloor™ Ultimate Hardwax Natural & Solidfloor™ Woodcleaner. Suitable for underfloor heating & cooling (visit www.solidfloor.com for more information).







