


## **SPECIALS Planks**

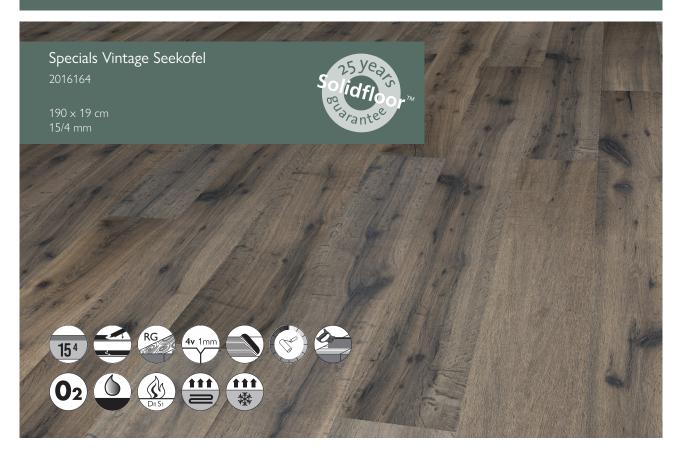

**Packaging** 

Boards per pack: 8 boards 2,888 m<sup>2</sup> m² per pack: 24,779 kg Weight per pack:

Broken lenghts per pack: 25% minimal 60 cm length

Packs on a pallet: 40

Dimensions

Length: 190 cm Width: 19 cm Thickness (total): 15 mm 3,5-4,0 mm Top layer:

Dimensional tolerances according to EN13489

Length: 0,20% Width: 0,2 mm

Thickness: Total: 15 mm  $\pm$  0,2 mm

3,5-4,0 mm Top layer: Height difference between the panels: ≤0,2 mm

Squareness: ≤0.2% across the width ≤0.2% across the width Cup: Spring: ≤0.1% over the length Bend: ≤1% over the length

## Other Specifications

Formaldehyde emission: Insulation value:

R=0,11m2 k/w Brinell hardness: Average HB 3.7

## Additional specifications

Rounded Construction: 3-layerd 7% +/- 2% Moisture content: Click-Connection Locking system:

## Instructions and Maintenance

Oil immediately after installation.

Maintain with Solidfloor™ Ultimate Hardwax Natural & Solidfloor™ Woodcleaner. Suitable for underfloor heating & cooling (visit www.solidfloor.com for more information).







