


## SPECIALS

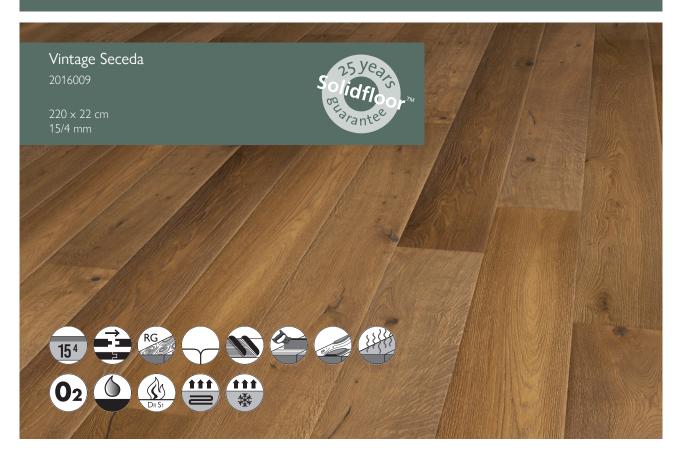

**Packaging** 

Boards per pack: 6 boards m² per pack: 2,904 m² Weight per pack: 25 kg

Broken lenghts per pack: 25% minimal 60 cm length

Packs on a pallet: 35

**Dimensions** 

Length:220 cmWidth:22 cmThickness (total):15 mmTop layer:3,5-4,0 mm

Dimensional tolerances according to EN13489

Length: 0,20% Width: 0,2 mm

Thickness: Total: 15 mm  $\pm$  0,2 mm

Top layer: 3,5-4,0 mm Height difference between the panels: ≤0,2 mm

Squareness: ≤0.2% across the width
Cup: ≤0.2% across the width
Spring: ≤0.1% over the length
Bend: ≤1% over the length

## Other Specifications

Formaldehyde emission: E1
Insulation value: R=0,11m2 k/w
Brinell hardness: Average HB 3.7

## Additional specifications

Bevel: Rounded
Construction: 3-layer
Moisture content: 7% +/- 2%
Locking system: Tongue and groove

## Instructions and Maintenance

Oil immediately after installation.

Maintain with Solidfloor™ Ultimate Hardwax Natural & Solidfloor™ Woodcleaner. Suitable for underfloor heating & cooling (visit www.solidfloor.com for more information).

