


SPECIALS Deep Brushed

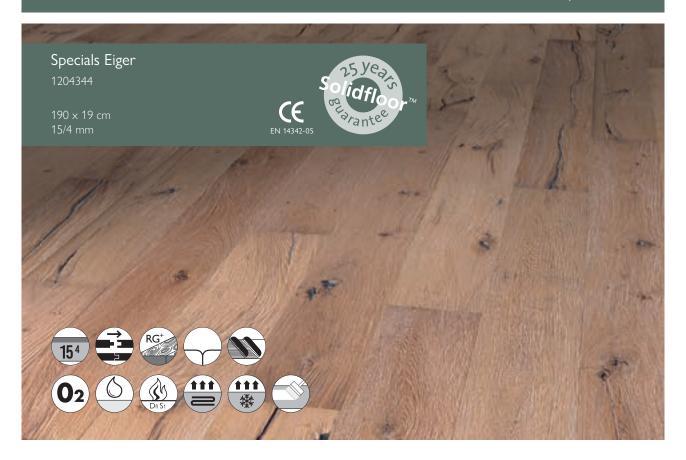

Packaging

Boards per pack: 8 boards 2,89 m² m² per pack: Weight per pack: 24 kg

Broken lenghts per pack: 25% minimal 60 cm length

Dimensions

Length: 190 cm Width: 19 cm 15 mm Thickness (total): 3,5-4,0 mm Top layer:

Dimensional tolerances according to EN13489

Length: 0,20% Width: 0,2 mm

Total: 15 mm ± 0,2 mm Thickness:

3,5-4,0 mm Top layer: Height difference between the panels: ≤0,2 mm

≤0.2% across the width Squareness: Cup: ≤0.2% across the width ≤0.1% over the length Spring: Bend: ≤1% over the length

Other Specifications

Formaldehyde emission: Insulation value: R=0,115m2 k/w Brinell hardness:

Additional specifications

Rounded Construction: 3-layerd 7% +/- 2% Moisture content: Locking system: Tongue and groove

Instructions and Maintenance

Oil immediately after installation.

Maintain with Solidfloor™ Ultimate Hardwax White & Solidfloor™ Woodcleaner. Suitable for underfloor heating & cooling (visit www.solidfloor.com for more information).







Average HB 3.7



