


PIETBOON by Solidfloor™

Prime

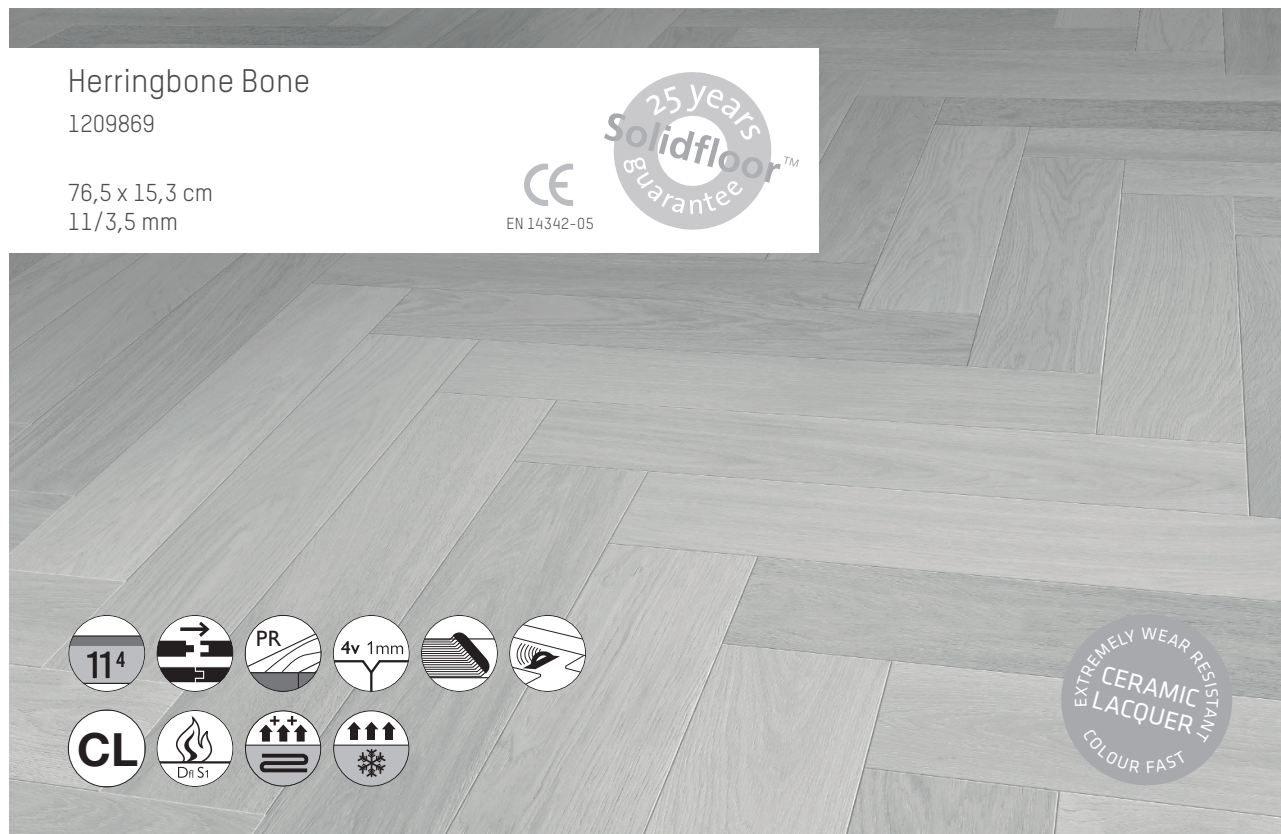


Herringbone Bone

1209869

76,5 x 15,3 cm
11/3,5 mm

CE
EN 14342-05

25 years
Solidfloor™
guarantee

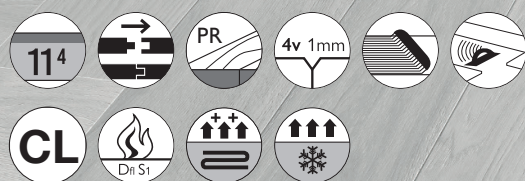

EXTREMELY WEAR RESISTANT
CERAMIC LACQUER
COLOUR FAST

Packaging

Boards per pack:	12 boards
m ² per pack:	1,40 m ²
Weight per pack:	13 kg
Broken lengths per pack:	Not allowed

Dimensions

Length:	75 cm
Width:	15 cm
Thickness (total):	11 mm
Top layer:	3,5 mm

Dimensional tolerances according to EN13489

Length:	0,10%
Width:	0,2 mm
Thickness:	Total: 11 mm ± 0,2 mm
Top layer:	3,5 mm
Height difference between the panels:	≤0,2 mm
Squareness:	≤0.2% across the width
Cup:	≤0.2% across the width
Spring:	≤0.1% over the length
Bend:	≤1% over the length

Other Specifications

Formaldehyde emission:	E1
Insulation value:	R=0,08m ² k/w
Brinell hardness:	Average HB 3.7
Bevel:	1 mm 4-sided
Construction:	2-layerd
Moisture content:	7% +/- 2%
Locking system:	Tongue and groove

Instructions and Maintenance

Ceramic Lacquer.
Maintain with Solidfloor™ Easy Protect & Solidfloor™ Easy Clean (visit www.solidfloor.com for more information).

