


# RENOPARK

Planks

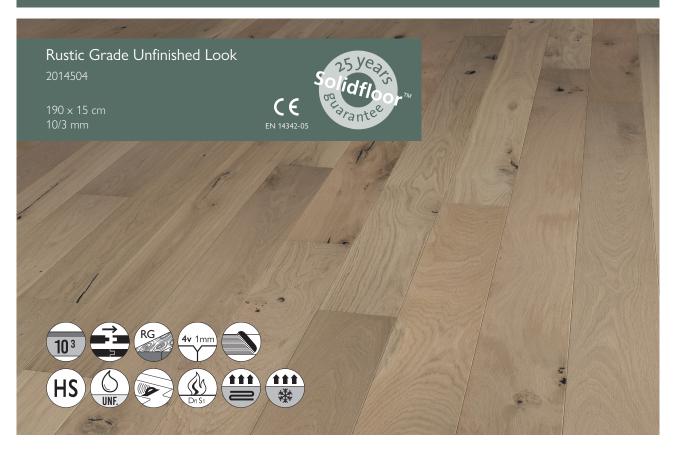

## Packaging

Boards per pack: m<sup>2</sup> per pack: Weight per pack: Broken lenghts per pack:

#### Dimensions

Length: Width: Thickness (total): Top layer: 190 cm 15 cm 10 mm 2,5-3,0 mm

25% minimal 60 cm length

9 boards

2,565 m<sup>2</sup>

16,5 kg

## Dimensional tolerances according to EN13489

Length:	0,20%
Width:	0,2 mm
Thickness:	Total: 10 mm ± 0,2 mm
Top layer:	2,5-3,0 mm
Height difference between the panels	: ≤0,2 mm
Squareness:	≤0.2% across the width
Cup:	≤0.2% across the width
Spring:	≤0.1% over the length
Bend:	≤1% over the length

# Other Specifications

Formaldehyde emission: Insulation value: Brinell hardness:

#### Additional specifications

Bevel: Construction: Moisture content: Locking system:

#### Instructions and Maintenance

Does not need to be oiled after installation. Maintain with Solidfloor™ Ultimate Hardwax White & Solidfloor™ Woodcleaner. Suitable for underfloor heating & cooling (visit www.solidfloor.com for more information).

E1

R=0,07m2 k/w

Average HB 3.7

1 mm 4-sided

Tongue and groove

2-layerd

7% +/- 2%

