


# RENOPARK

Chevron

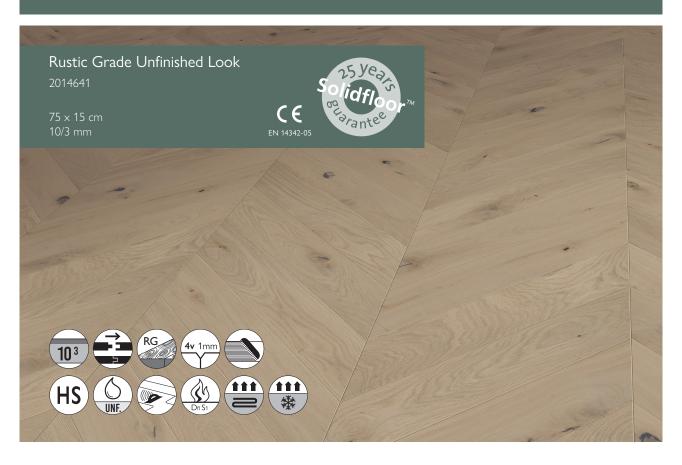

**Packaging** 

Boards per pack: 10 boards m² per pack: 1,125 m² Veight per pack: 7,2 kg
Broken lenghts per pack: Not allowed

### **Dimensions**

 Length:
 75 cm

 Width:
 15 cm

 Thickness (total):
 10 mm

 Top layer:
 2,5-3,0 mm

## Dimensional tolerances according to EN13489

Length: 0,20% Width: 0,2 mm

Thickness: Total: 10 mm  $\pm$  0,2 mm

Top layer: 2,5-3,0 mm Height difference between the panels: ≤0,2 mm

Squareness:≤0.2% across the widthCup:≤0.2% across the widthSpring:≤0.1% over the lengthBend:≤1% over the length

# Other Specifications

Formaldehyde emission: E1
Insulation value: R=0,07m2 k/w
Brinell hardness: Average HB 3.7

## Additional specifications

Bevel: 1 mm 4-sided
Construction: 2-layerd
Moisture content: 7% +/- 2%
Locking system: Tongue and groove

#### Instructions and Maintenance

Does not need to be oiled after installation.

Maintain with Solidfloor<sup>TM</sup> Ultimate Hardwax White & Solidfloor<sup>TM</sup> Woodcleaner. Suitable for underfloor heating & cooling (visit www.solidfloor.com for more information).









